


# Bulbed Speed Rivet SHBCCZ



<b>Head Type</b>	Countersunk Head
<b>Material</b>	Carbon Steel
<b>Finish</b>	Zinc Plate

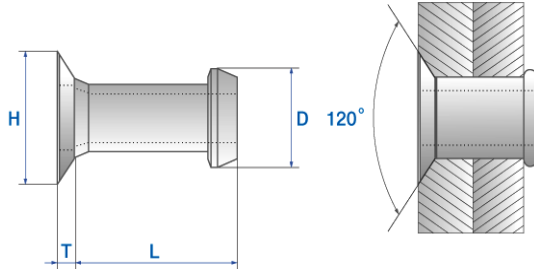

H = Head Diameter  
 T = Head Thickness  
 L = Body Length  
 D = Rivet Diameter

\*Dimensions in millimeters

Part Number	Rivet Diameter (D) nom.	Hole Size	Body Length(L)	Grip Range	Head Diameter (H)	Head Thickness (T)	Standard Strength (kN) typ.	
							Shear	Tensile
SHBCCZ-032042	3.2	3.26~3.34	4.2	1.50~1.70	5.8	0.69	0.80	1.40
SHBCCZ-032043			4.3	1.30~2.30		0.74		
SHBCCZ-032048			4.8	1.60~2.70		0.76		
SHBCCZ-032058			5.8	2.60~3.80				
SHBCCZ-032068			6.8	3.60~4.80				
SHBCCZ-032078			7.8	4.60~5.80				
SHBCCZ-032088			8.8	5.60~6.80				
SHBCCZ-040052	4.0	3.97~4.04	5.2	1.60~2.90	6.9	1.02	1.50	2.50
SHBCCZ-040057			5.7	2.20~3.40				
SHBCCZ-040062			6.2	2.70~3.90				
SHBCCZ-040072			7.2	3.70~4.90				
SHBCCZ-040082			8.2	4.70~5.90				
SHBCCZ-040092			9.2	5.70~6.90				